


독일 왈트제 후크형 톱링크 실린더 (Cat.3S)



대형톱링크후크 부품

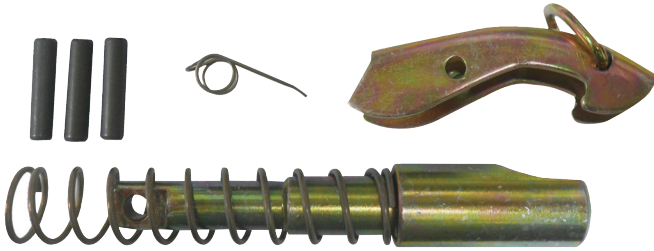

독일 왈트 수입 완제품



독일 왈트제 Cat.3S후크

[4-1] 대형 625(316) 150~200마력 (Cat.3S/90)

TK1330701




(30mm 연장 브라켓)

A	B	최소길이	최대길이
50	51	625	810

[4-2] 대형 700(317) 150~200마력 (Cat.3S/90)

TK1330701

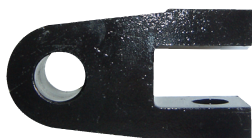

(30mm 연장 브라켓)

A	B	최소길이	최대길이
50	51	700	950


후크형 톱링크 실린더 (Cat.3H)

WALTERSCHEID

수출형링크후크 부품



후크 독일 왈트제
실린더 국내제작 독일수출제품

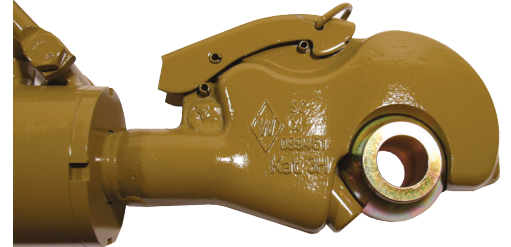

독일 왈트제 Cat.3H후크



[5-1] 수출형 600(314) 125~150마력 이하 Cat.3H/70

TK140254



Φ25/28/32

Φ25



(30mm 연장브라켓)

A	B	최소길이	최대길이
50	51	605	790



[5-2] 수출형 670(315) 125~150마력 이하 Cat.3H/70

TK140255



Φ25/28/32

Φ25




(30mm 연장브라켓)

A	B	최소길이	최대길이
50	51	670	920

후크형 톱링크 실린더 (Cat.2)

Cat.2 톱링크 부품

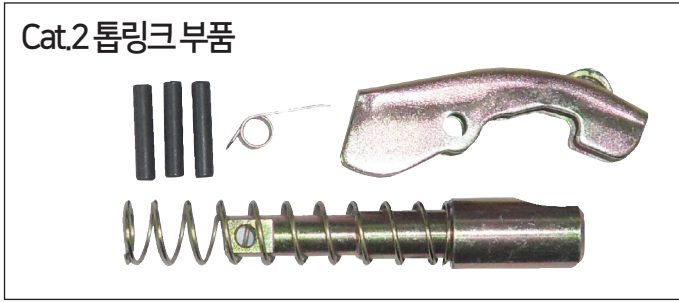

후크, 실린더 국내제작



국산 Cat.2 후크

B

[6-1] 독일형 550(312)

100마력이하 Cat.2/63

N0620041



A	B	최소길이	최대길이
45	51	550	730

B

[6-2] 독일형 600(313)

100마력이하 Cat.2/63

N0620041



A	B	최소길이	최대길이
45	51	600	830

C

[6-3] 독일형 600대(TG314) 100~125마력이하 Cat.2/70

N0620042



A	B	최소길이	최대길이
50	51	595	780

C

[6-4] 독일형 660대(TG315) 100~125마력이하 Cat.2/70

N0620042



A	B	최소길이	최대길이
50	51	660	910

일반형 톱링크 실린더

볼엔드, 실린더 국내 제작

[7-1] 일반형 400

TK140061



A	B	최소길이	최대길이
41	45	400	526

[7-2] 일반형 450

TK140061



A	B	최소길이	최대길이
41	45	450	630

[7-3] 일반형 500

TK140061



A	B	최소길이	최대길이
45	45	500	739

A

[7-4] 일반형 500대

N0620040



A	B	최소길이	최대길이
45	45	500	725

A

[7-5] 일반형 550

N0620040



A	B	최소길이	최대길이
45	45	550	830

B




[7-6] 특수작업기용

N0620041




A	B	최소길이	최대길이
45	51	490	670


유압 톱링크 파워 범위

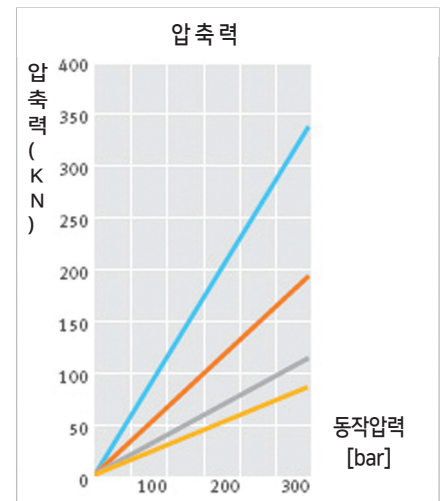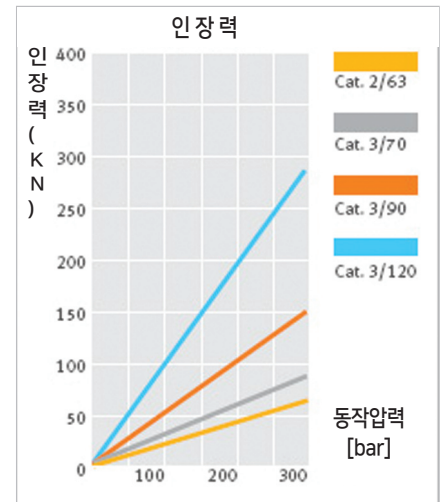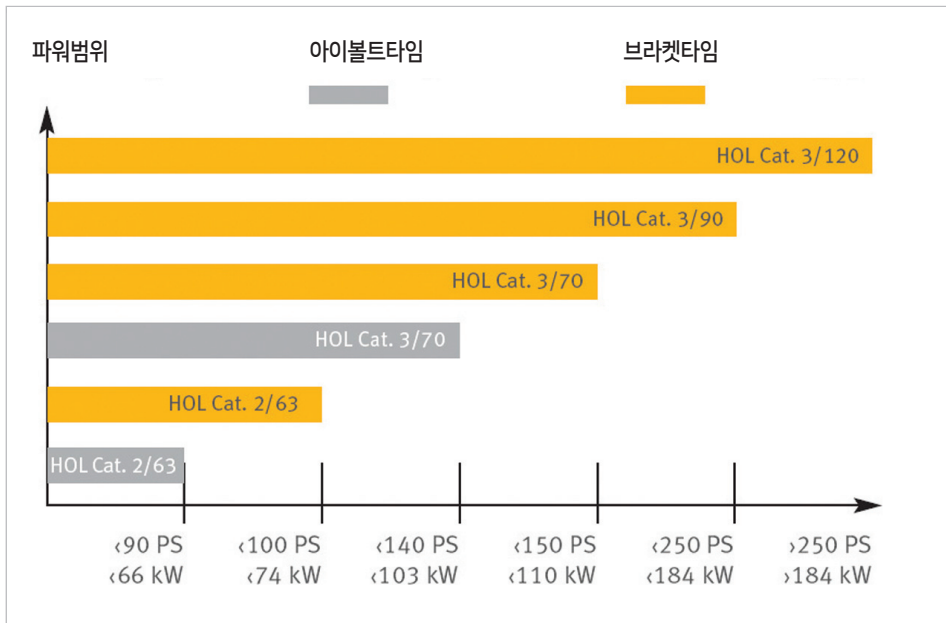

더블체크밸브 채택으로 안전한 작업환경

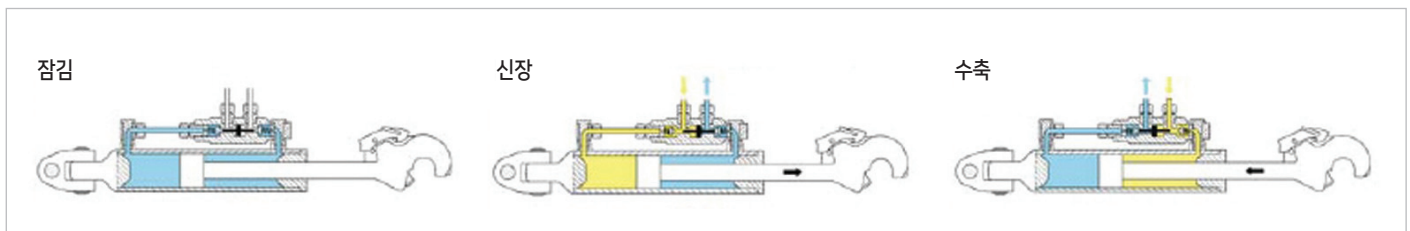

유압 실린더 부품

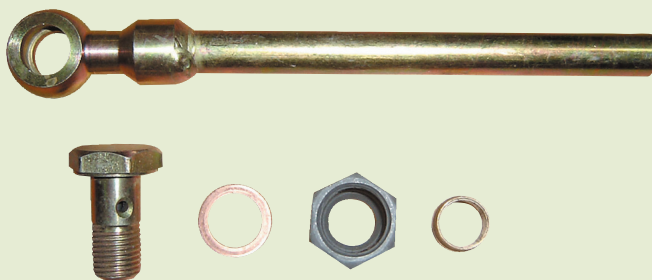

번호	품명	1대분
	유압 파이프	2
	유압 볼트	2
	동 와셔	4
	유압 너트	2
	유압 너트 부싱	2